

The Superior Air-Jacketed Hot Rubber Melters

From the Innovators of Rubber Master Technology

A-110

NEW




Now available with optional Diesel Burner System

THE VERSATILE A-110

Transports easily in back of a pick-up; can be hoisted directly to roof. Easily accommodated in commercial elevators, the A-110 fits through standard 34" doorways and comes equipped with optional casters for easy movement. Also optional: Quick mount/dismount trailer. Pump system also available with gas or electric drive as well. Material ready in 30 minutes.

Optional Trailer

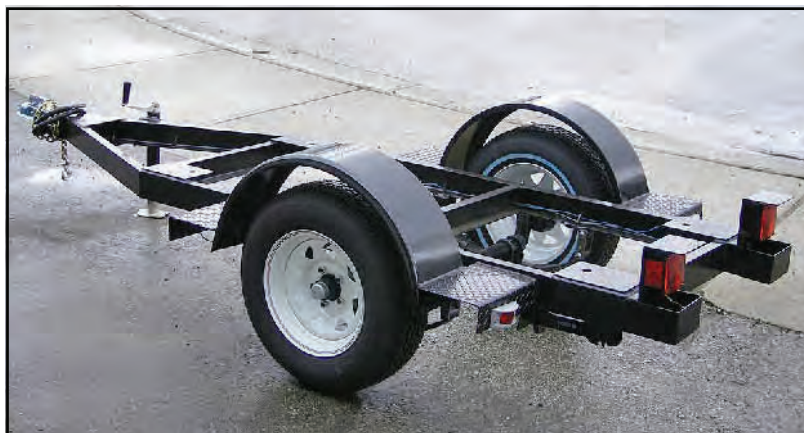

www.aamelters.com
www.rubbermaster.com

E-Mail: roger@aamelters.com

The Superior Air - Jacketed Hot Rubber Melters
(Propane, Diesel, & Electric Heat Systems Available)

(From the Innovators of Rubber Master Technology)



SPECIFICATIONS: A-110 (100 US gallon capacity)

Heat Transfer Oil	None Required	Fire tube.....	4" Sch 80 Stainless steel
Capacity (Custom Sizes Available)	100 US Gallons		
Agitator.....	Honda 5.5 H.P. Gas, 110V Electric or Optional 6.0 HP Diesel Motor		
Overall Dimensions (Melter only)	L-88" W-33 5/8" H-45"		
Burner.....	Adjustable Liquid Propane 1 X 500,000 BTU or Optional Beckett Diesel Burners		
Temperature Controls	Optional		
Inner Shell	3/16" Rolled Steel		
Outer Shell	1/8" Rolled Steel		
Insulated Jacket	2" High Temp. Fiberglass		
Shipping Weight (Melter only)	1500 lbs.		
Optional Trailer (w/Melter mounted)	L-144" W-58" H-66"		
Suspension 4" Drop Axle	3500 lb. Axle and Springs		
Tires	2 X 6.00 X 14"		
Trailer Chassis	4" Steel Channel		
Brakes	Optional		
Tow Hitch	As ordered c/w safety chain		
Pump	Optional 1 1/2" Viking		
Horizontal Wand Pumping System	Optional		
Shipping Weight (trailer only)	275 lbs.		

Heated Material Output:

- material capacity: 100 US gallons	☐	100 gal./1.58 hr x 78.9 % = 136 gal./hr
- heat up time: 35 min's (0.58 hr.)	☐	514.9 L /1.58 hr x 78.9 % = 700 L /hr
- efficiency: 78.9%		